



TG Steels

2367
PRIME

Hot work tool steel with good hot properties and an excellent thermal conductivity for hot work applications

2367 PRIME;

- is a 5% Cr steel produced by a process that ensures a good level of cleanliness.
- is the grade 1.2367 with a slightly modified chemical composition in order to achieve a better homogeneity than the standard grade 1.2367.
- has a good hot strength and tempering back resistance.
- has a good polishability, and is good for texturing.
- can also be welded and exhibits good machinability.
- has a very good suitability for surface treatments such as gas, ionic or salt bath nitriding, as well as PVD or CVD coatings.

Applications

2367 PRIME can be used for the production of stamping dies, shrink bands, die-casting molds of light alloys, as well as for cavities and injection molds of molds for plastics.

Compared to 2343 PRIME steel, 2367 PRIME has a better tempering resistance and a higher hardness at the same operating temperature.

Main properties

- Good hot wear resistance
- Very good thermal conductivity
- Good polishability
- Good hot strength and tempering back resistance
- High hardenability
- Suitable for surface treatments

Chemical composition (*typical*)

C	Si	Mn	Cr	Mo	V
0.37	0.40	0.40	5.00	2.95	0.50

Designation

Werkstoff Nr	ISO	China GB	JIS Japan	UK	AISI USA	Russia Gost	AFNOR	Other / Special
1.2367	X38CrMoV5-3	-	-	-	-	-	Z38cdv5-3 Mod	-



Structure

The structure of the 2367 PRIME is fine and homogeneous without precipitation or alignments of carbides.

Segregation: According to NADCA #207 - 2016, AS1 - AS4 (*annealed conditions*)

Microstructure: According to NADCA # 207 - 2016, HS1 - HS4 (*heat treated conditions*)

Typical mechanical properties in hardened conditions (*results from internal tests not indicated on the certificates*)

TS MPa	YS 0.2% MPa	Elongation %	Hardness HRC	KU J à 20°C
1450	1200	13	44	≥ 20

Hardness at the time of delivery

Annealed for 220 HB max.

Physical properties

Temperature	20°C	200°C	400°C	800°C
Volumic mass kg/m ³	7800	7770	7700	7540
Young Modulus N/mm ²	205000	198000	177000	130000
Thermal conductivity W/m.K	29.9	30.5	33.5	36
Coefficient of linear expansion 10 ⁻⁶ /K	11.8	12.5	13.1	13.5

Heat treatment

SOFT ANNEALING

Temperature: 730 - 770°C, duration 1h + 1h for 25 mm thickness. slow cooling in the furnace (10 to 20°C/h). The atmosphere in the furnace must be reducing to avoid decarburization of the steel.

STRESS RELIEVING

After machining, it is recommended to perform stress relieving at 650°C for a minimum of 2 hours, followed by slow cooling in the furnace to 450°C.

AUSTENITIZATION

In order to avoid any risk of cracking it is recommended to preheat in 2 steps.

- **1st preheating step:**
temperature: 550°C time: 30 s/mm of thickness

- **2nd preheating step:**
temperature: 750°C time: 30 s/mm of thickness

Recommended austenitizing temperature: 1010 - 1030°C. The holding time should not be too long to avoid a risk of grain coarsening and a loss of toughness. It is recommended to keep the part at the austenitizing temperature 30 minutes per inch of thickness as soon as the temperature of the surface reach the austenitization temperature.

QUENCHING MEDIUM


Oil at 80°C, vacuum (*pressure > 6 bars*), salt bath 500 - 550°C.

To ensure good toughness, treatment with oil or salt bath is preferable.

TEMPERING

To ensure a minimum residual austenite rate as well as greater tool stability, it is essential to perform a double tempering. Each tempering is followed by a cooling under 100°C.

Each tempering time must be at least equal to 1h + 1h for 25 mm of thickness of the treated part (*equivalent thermal thickness*).

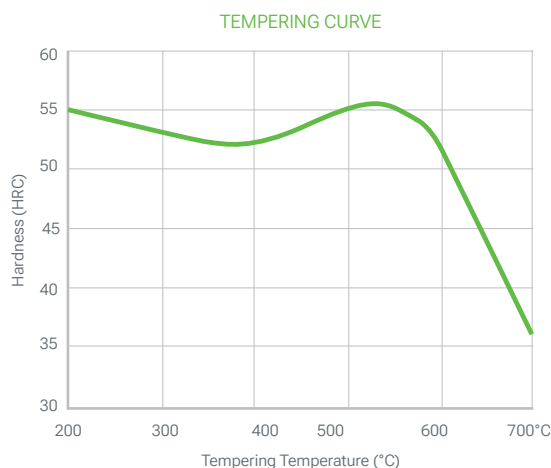

Surface treatment

NITRIDING

2367 PRIME can be nitrided at temperatures less than or equal to 20°C below tempering temperatures without risk of deterioration of the mechanical characteristics. With gas nitriding at 520°C (25 h) the surface hardness is 1020 HV1 with a diffusion layer of 0.2 mm.

PVD, CVD

2367 PRIME is suitable for all kinds of PVD and CVD treatment as soon as the treatment temperature is 30°C lower than the last tempering temperature.

Polishing

2367 PRIME is perfectly suitable for polishing in the treated state and can be used for applications requiring a sufficient level of polish for translucent - transparent parts ($R_t \leq 20 \mu\text{m}$, CNOMO level 2, Rugotest N7).

Optimal polishing is achieved by performing consecutive steps with similar roughness and stopping each step as soon as the last scratch from the previous step disappears.

Texturing

2367 PRIME is suitable for chemical or laser texturing.

Machining

The machining parameters below are given for information only and must be adapted according to the equipment and usual machining conditions.

TURNING

	Carbide tool		HSS tool
	Rough machining	Finishing	Finishing
Cutting speed m/min	140 - 180	180 - 230	17 - 22
Feed mm/r	0.2 - 0.4	0.1 - 0.2	0.1 - 0.3
Depth of cut mm	2 - 4	0.5 - 2	0.5 - 2

MILLING: SURFACING

	Milling with carbide tools		HSS tool
	Rough machining	½ Finishing	Finishing
Cutting speed m/min	160 - 180	180 - 200	210 - 280
Feed mm/r	0.45	0.4 - 0.25	0.15 - 0.05
Depth of cut mm	1 - 3	1 - 2	1 - 0.5

DRILLING: HSS TWIST DRILL

Drill diameter mm	Cutting speed m/min	Feed mm/t
<5	14 - 16	0.05 - 0.15
5-10	14 - 16	0.15 - 0.20
10-15	14 - 16	0.20 - 0.25
15-20	14 - 16	0.25 - 0.30

DRILLING: CARBIDE DRILL

	Carbide type		
	Indexable insert	Solid carbide	Carbide tip
Cutting speed m/min	160 - 180	100 - 130	55 - 80
Feed mm/t	0.05 - 0.10	0.10 - 0.25	0.15 - 0.25

FINE GRINDING

General indications for grinding wheels to be used on 2367 PRIME in the heat treated condition. Usually, rather soft vitrified aluminum oxide grinding wheels (*grades G for plane grinding to K for cylindrical grinding*) are used. Particular attention will be paid to effective cooling of the surface during grinding to prevent degradation of the material surface.

ELECTRO-DISCHARGE MACHINING

2367 PRIME is also suitable for EDM machining (*wire or electrode*). Preferably, the machining will be carried out with a low current density and a high frequency in order to limit the thickness of the white layer as much as possible. Then it is necessary to carry out a stress relieving at 25°C below the last tempering in order to reduce the level of residual stresses (*which could lead to a risk of cracking*) and to carry out a polishing to completely remove the white layer formed during the discharge machining process.


Welding

It is not recommended to weld 2367 PRIME but if this is mandatory it could be welded either in the annealed condition (*better*) or in the heat treated condition.

- **Method:** TIG (*pure Ar protection*)
- **Feeder wire:** AISI H11-H13
- **Preheating:** 350°C.

Hold at 200°C during the welding operation with a maximum interpass temperature at 480°C. Slow cooling (*max 20°C/h*) after welding.

- » **In the treated state:** tempering at 600°C with a tempering time at least equal to 1h + 1h for 25mm of thickness of the treated part (*equivalent thermal thickness*)
- » **In the annealed state:** carry out a soft annealing under the usual conditions: temperature: 840 - 870°C, duration 1h + 1h for 25 mm of thickness. Slow cooling in the furnace (*10 to 20°C/h*).

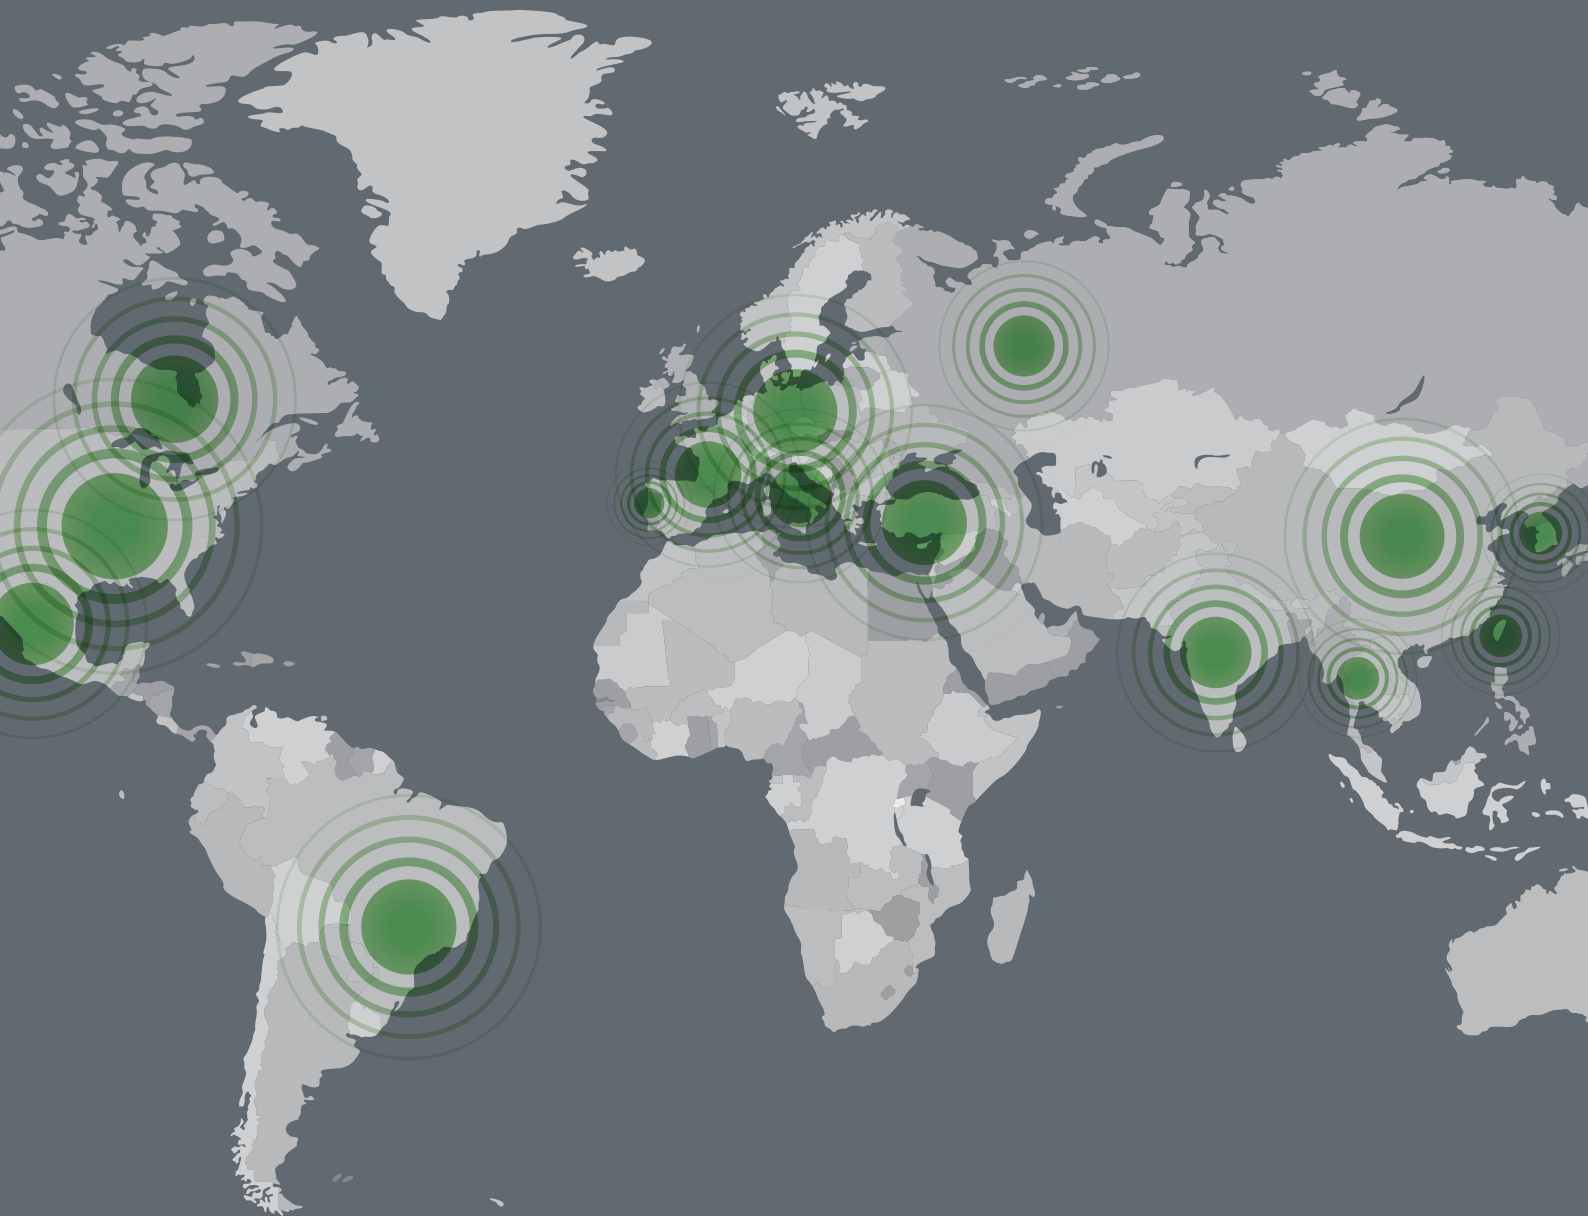

TG Steels

E info@tgsteels.com W www.tgsteels.com

Atlas Special Steels. s.l.
Avinguda de Can Sucarrats, 88-92.
08191 Rubí, Barcelona, Spain
+34 938 233 590
info@atlassteels.eu

OSS Canada Special Steel Inc
2384 Speers Rd, Oakville.
ON, Canada L6L 5M2
905-827-5888
sales@oss-material.ca

Atlas Special Steels Unipessoal. Lda
Rua do Antuã, nr. 64 pavilhão A e B
3720-558 Travanca - OAZ, Portugal
+351 256 245 497
info@atlassteels.eu

OSS Special Steel Inc.
2015 Mitchell Blvd Suite C
Schaumburg, IL 60193
(618) 426 - 6158
sales@oss-material.com

Five Star Special Steel Europe srl
Via Glenn Curtiss, 9, 25018
Montichiari BS, Italy
+39 030 524 3724
info@fssseurope.com

TG Steels s.r.o.
Libušina 850, Dubí 272 03
Kladno, Czech Republic
info@tgsteels.com

Caxias Metals Ltda
Rua Wilibaldo Lauter, 282
Imigrante - RS Brazil
+51.983136999
raporsche@gmail.com

TG Middle East
Kocaeli KOBİ OSB, Köşeler Mh.,
3. Cd., No: 15 Dilovası, Kocaeli, Türkiye
+90 262 728 11 67 (pbx)
info@tgme.com.tr